

UPster H 500 M2 Gio- Hood type dishwasher

The MEIKO UPster® H M2 is designed for tableware and coffee cups, but also ideal as a high-performance dishwasher for glasses. With its sleek, easy-clean stainless steel surfaces and clearly designed, user-friendly operating panel, it offers impressive visual appeal from the outside. But things get even better on the inside: optimised wash and rinse system, perfected tank design and a unique filter system.

Execution for: United Arab Emirates Hood type dishwashing machine

Fresh water line: Soft cold water 0-3 °dH
3-phase current: 3N PE 400V 50Hz
GiO MODULE (separate)
Thermolabel



Technical data

Rack capacity/h (theoretical)

60 / 40 / 17 racks/h

Programme cycle

90 / 150 / 210 s

Rack dimension

500 x 500 mm (540 x 500)

Entry height

440 mm

Dimensions (W x Hmin x D)

635 (687) x 1470 x 750 (850) mm (with hood rod)

Electrical feeding cable

3-phase current 3N PE 400V 50Hz*
Total connected load: 12.6 kW
max. rated current: 19.5 A

Local fuse protection

20 A

Machine protection class

IP X4

Equipment

Control system MIKE CPU1
Infrared interface for wireless communication
Automatic program start
Leakage detector
Boiler safety device
Drain pump
AktivPlus wash water filter system
Automatic self-cleaning when tank is drained
Back wall cladding
Integrated reverse osmosis (separate, with connection and discharge set)
Bracket for integrated reverse osmosis unit, left
Thermolabel

Fresh water line

For reverse osmosis: connecting set with stop valve,
Pressure regulator, filter 10 µm with activated carbon
Internal: air gap 'AA' in accordance with EN 1717 with booster pump

Fresh water supply


Minimum flow pressure 100 kPa / 1.0 bar in front of solenoid valve
Maximum pressure 500 kPa / 5.0 bar in front of pressure reducer
Max. supply water temperature 35 °C

Flow rate	total 4.3 l/min (at 15 °C inlet temperature and a flow pressure of 200 kPa / 2 bar) Permeate 2.0 l/min Concentrate 2.3 l/min
Fresh water thresholds	Temperature cold water min. 1 °C to max. 35 °C electrical conductivity < 1000 µS/cm Total hardness max. 28 dH / 5 mmol/l CaCO ₃ Free of particles > 10 µm Iron < 0.10 mg/l Manganese < 0.04 mg/l Chlorine < 0.10 mg/l (free chlorine) Potassium permanganate < 10 mg/l Silicic acid < 10 mg/l
Final rinse water quantity	2.6 liters/cycle
Boiler	Contents: 10.5 l Heater: 7.50 kW Temperature: 83 °C
Wash tank	Filling: 22.0 l Heater: 4.00 kW Temperature: 74 °C
Wash pump	Performance: 0.75 kW
Dosing of rinse aid	Hose pump (24 V) with time control and suction lance
Detergent dosage	Hose pump (24 V) with time control and suction lance
Material	Cladding: 1.4301 Wash tank: 1.4301 Boiler: 1.4571
Heat emission	or 10 programme cycles/h total: 1.1 kW perceptible: 0.7 kW latent: 0.4 kW
Ventilation flow rate	270 m ³ /h
Steam emission	0.5 kg/h
Emission sound pressure level at the workplace (LpA)	67 dB

*Note:
Electrical equipment suitable for supply voltage:
3N PE 400 V 50 HZ (3N PE 380-415 V 50 Hz)

1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine
1.1	drain (max. 300 mm above finished floor level), DN 50
2.0	Machine connection: fresh water supply, G 3/4"
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/l CaCO ₃ (max. 3°dH) Flow rate: total 4.3 l/min (at 15 °C inlet temperature and a flow pressure of 200 kPa / 2 bar) electrical conductivity < 1000 µS/cm Minimum flow pressure: 100 kPa / 1.0 bar in front of solenoid valve Maximum pressure: 500 kPa / 5.0 bar in front of pressure reducer stopcock and fine screen ≤ 25 µm
3.0	Machine connection: electrical connection cable 5G 2,5mm ²
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz nominal current / - capacity: 19.5 A / 12.6 kW Fuse protection: 20 A ⊕ Voltage equalising cable The master switch must be provided on site Electrical equipment suitable for supply voltage: 3N PE 380-415 V 50 Hz
6.0	Heat load of warewash area The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % Recommended suction area according to German EN 16282 or any local regulations have to be observed to determine ventilation of wash areas The total heat load includes 6.1
6.1	Heat load of the machine in normal washing operation: for 10 programme cycles/h total 1.1 kW, perceptible 0.7 kW, latent 0.4 kW
	For the total space load, all other space loads must be considered. The space ventilation must be designed in accordance with EN 16282.

all cables, pipes etc leaving machine 1,4 m	
the position of the connection piping can also be mirror-inverted!	
Height adjustable: machine feet +/- 30 mm, MEIKO table feet +/- 15 mm	
Machine Equipment	
(A)	Entry height
(D)	Rinse agent pipe and suction lance
(E)	Detergent dosing unit with suction lance
Feeding table on site	
Discharge table on site	
GIO MODULE (separate, on bracket on the left side)	
Thermolabel	
	Please observe the installation indications of the additional document MP_T-INFO-GIO_EN.pdf

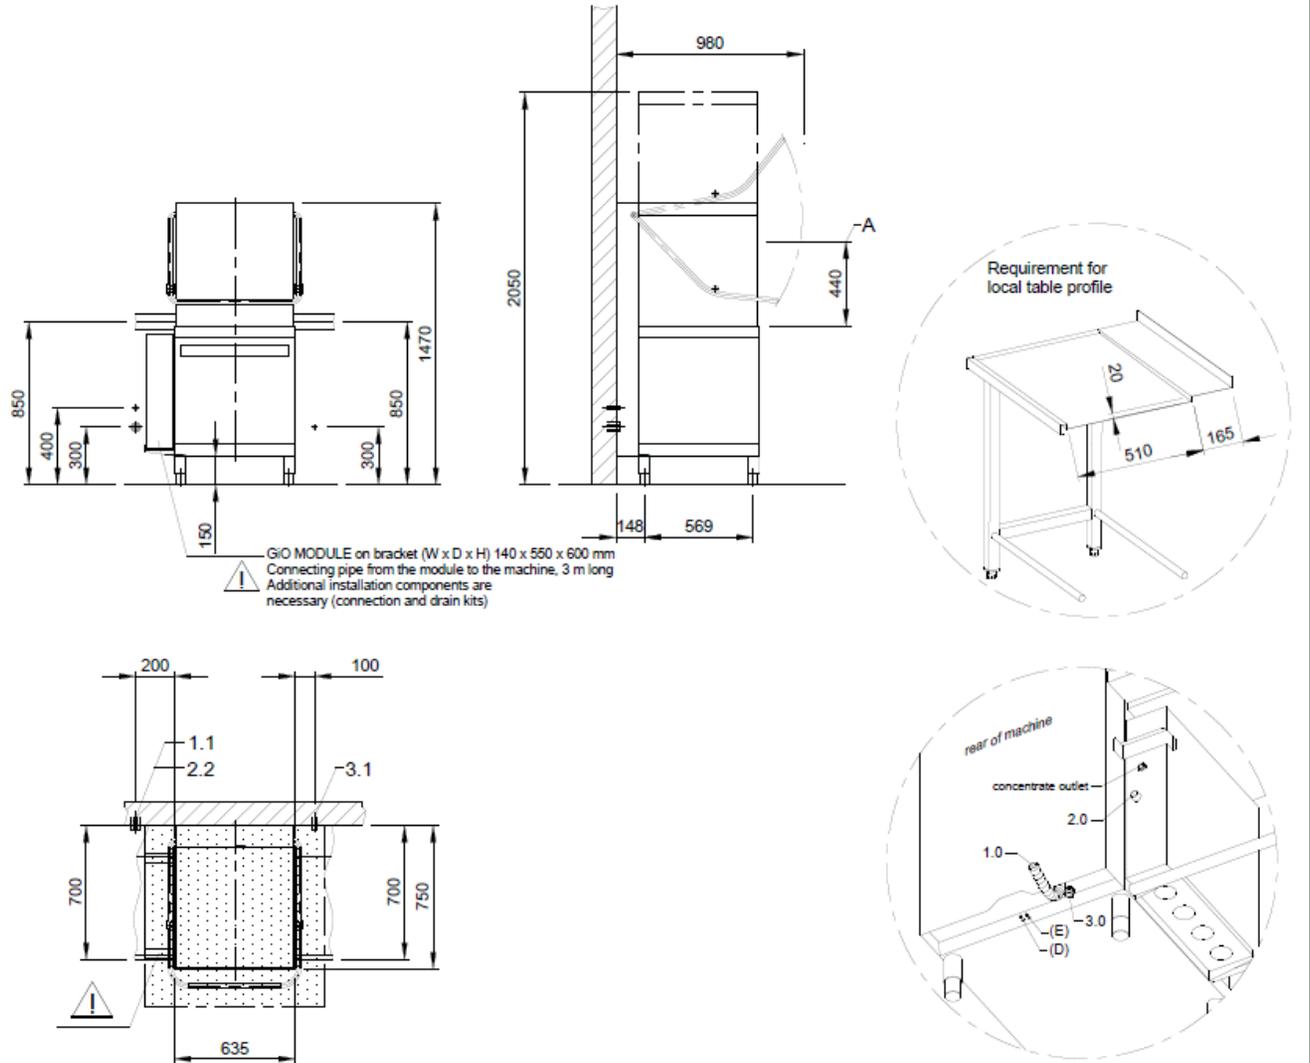

<p>MEIKO MIDDLE EAST FZE GoldDiamond Park, Building#6, office #206 P.O. Box 282365, U.A.E.-Dubai Phone +971 43 41 51 72 E-MAIL: wat@meiko.de</p> <p><small>This drawing may not be neither passed to third parties for their information or copied or used for competitive purposes without our consent. All rights reserved. We reserve the right to make changes resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process. It is also not subject to change management. Please note: This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Parbarnet.</small></p>	Revision		Type
	Reference	DISHWASHER STANDARD DRAWING / ARE	UPSTER H 500 M2 GIO MODULE SEPARATE THERMOLABEL
	TYPE: CROCKERY		
	Drawing-No. S00078785		Order-No.
Scale 1:25	drawn: 07.04.2020 m-iplan	checked: 07.04.2020 m-iplan	