


1.0 1.1 2.0 2.2 3.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine drain (max. 700 mm above finished floor level), DN 50 Machine connection: fresh water supply, G 3/4" Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/I CaCO ₃ (max. 3°dH) Flow rate: 5,0 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen $\leq 25 \mu m$ Machine connection: electrical connection cable 5G 6mm ² electricity supply to the machine: 3N PE 400V ~ 50Hz
2.0 2.2	drain (max. 700 mm above finished floor level), DN 50 Machine connection: fresh water supply, G 3/4" Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/I CaCO ₃ (max. 3°dH) Flow rate: 5,0 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen $\leq 25 \mu m$ Machine connection: electrical connection cable 5G 6mm ²
2.2	Soft cold water 10°C, DN 15, G 3/4 a max. 0,54 mmol/I CaCO₃ (max. 3°dH) Flow rate: 5,0 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 µm Machine connection: electrical connection cable 5G 6mm ²
	max. 0,54 mmol/I CaCO₃ (max. 3°dH) Flow rate: 5,0 l/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 μm Machine connection: electrical connection cable 5G 6mm ²
3.0	Machine connection: electrical connection cable 5G 6mm ²
0.0	electricity supply to the machine: 3N PE 400V ~ 50Hz
3.1	nominal current / - capacity: 25,4 A / 14,7 kW Voltage equalising cable The master switch must be provided on site
6.0	Heat load of warewash area
0.0	 The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 % Recommended suction area according to German EN 16282 or any local regulations have to be observed to determine ventilation of wash areas The total heat load includes 6.1
6.1	Heat load of the machine in normal washing operation: for 15 programme cycles/h total 4,5 kW, perceptible 3,0 kW, latent 1,5 kW For the total space load, all other space loads must be considered.
	The space ventilation must be designed in accordance with EN 16282.
	les, pipes etc leaving machine 1,4 m
Mac	hine Equipment
Tank /	boiler locked
(A) En	try height
Final ri	inse dosing unit with suction lance (blue connector)
	vall cladding



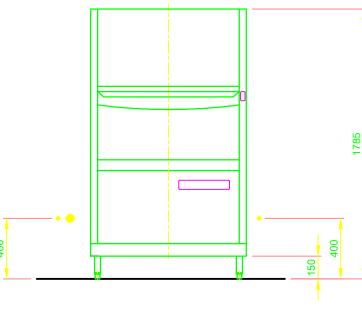



EN

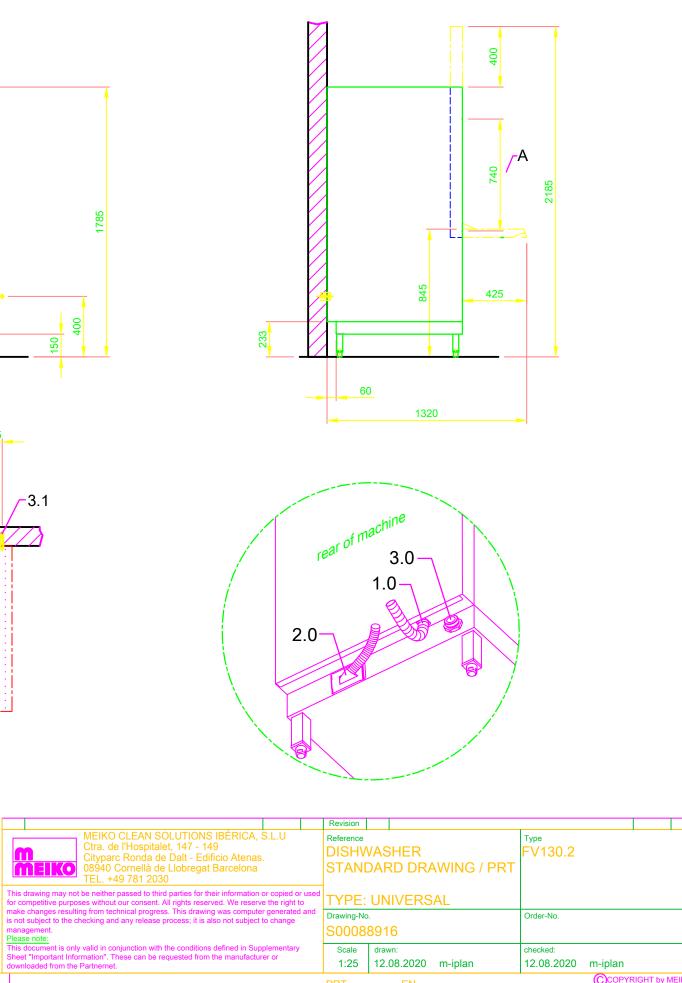

COPYRIGHT by MEIKO