


Ссор	YRIGHT by MEIKO	
1.0	machine connection: drain connection hose, DN 22 hose fitted as odour trap in interior of machine	
1.1	drain (max. 700 mm above finished floor level), DN 50	
2.0	Machine connection: fresh water supply, G 3/4"	
2.2	Soft cold water 10°C, DN 15, G 3/4 a	
	max. 0,54 mmol/l CaCO₃ (max. 3°dH)	
	Flow rate: 5 I/min Minimum flow pressure: 60 kPa / 0,6 bar in front of solenoid valve Maximum pressure: 500 kPa / 5,0 bar stopcock and fine screen ≤ 25 µm	
3.0	Machine connection: electrical connection cable 5G 10mm ²	
3.1	electricity supply to the machine: 3N PE 400V ~ 50Hz	
0.1	nominal current / - capacity: 31,0 A / 20,1 kW	
	Fuse protection: 32 A	
	♦ Voltage equalising cable	
	The master switch must be provided on site	
6.0	Heat load of warewash area	
	The values apply for the following room conditions: Room temperature 22 °C, rel. humidity 55 %	
	Recommended suction area according to German EN 16282 or	
	any local regulations have to be observed to determine	
	ventilation of wash areas	
	The total heat load includes 6.1	
6.1	Heat load of the machine in normal washing operation:	
	for 25 programme cycles/h total 5,4 kW, perceptible 3,6 kW, latent 1,8 kW	
	For the total space load, all other space loads must be considered.	
	The space ventilation must be designed in accordance with EN 16282.	
all cal	bles, pipes etc leaving machine 1,0 m	
the po	osition of the connection piping can also be mirror-inverted!	
Heigh	t adjustable: machine feet +/- 30 mm, MEIKO table feet +/- 15 mm	
Mac	chine Equipment	
(A) Entry height		
(D) Ri	(D) Rinse agent pipe and suction lance	
(E) Detergent dosing unit with suction lance		
Autor	natic hood system	
Feedi	ng table on site	
Disch	arge table on site	

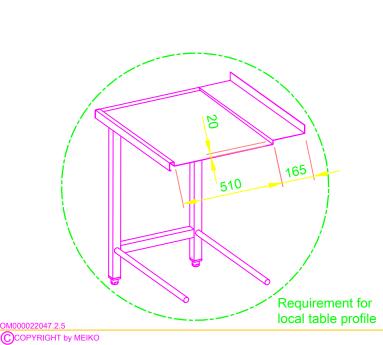

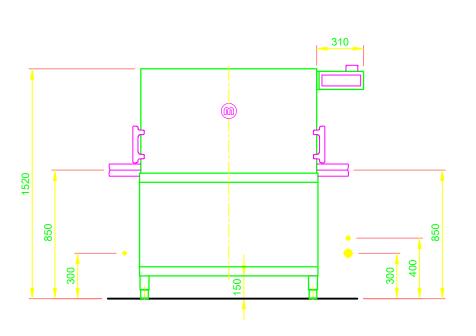

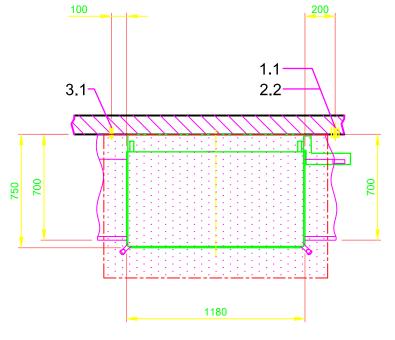

optional right/left opening for relocating the connection line

080

	Revision
	Reference DISH STAN
in the charge process resulting from technical progress. This drawing was computer generated and is not subject to the checking and any release process; it is also not subject to change	TYPE Drawing- S000
This document is only valid in conjunction with the conditions defined in Supplementary Sheet "Important Information". These can be requested from the manufacturer or downloaded from the Partnernet.	Scale 1:25
	BEL



