


# Technical data sheet

## UPster B690VAP CSS-Top

Execution for: Azerbaijan

© MEIKO 2015

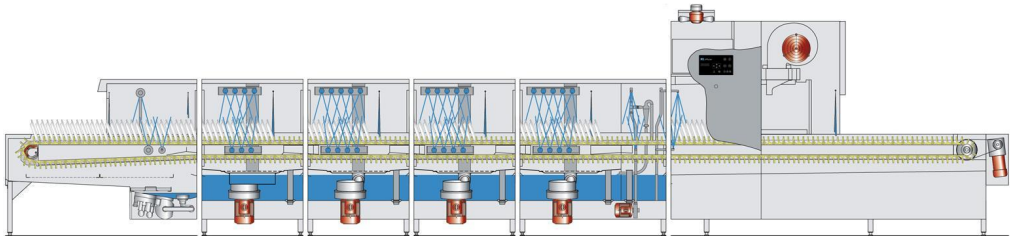

Schematic sectional view of machine

### Flight type dishwashing machine

B690VAP-nT-L-E1700-380/50-E-A3000-D1500-nC

Working direction: left - right

Power supply: 3N PE 380V 50Hz

Heating: Electric

Tank filling: Soft hot water

### Technical data

Performance*	Contact length	4500 mm
	Contact time*	2 minutes
	Transport speed 1 (DIN)	2,25 m/min
	Transport speed 2	3,00 m/min
	Transport speed 3	3,60 m/min
	Dish capacity (DIN EN)	7300 plates/h
	Dish capacity (min.)	9700 plates/h
	Dish capacity (max.)	11600 plates/h
Machine conveyor belt		MTB 1.11 Multi-purpose conveyor
Motors	Total	0 kW
Heating energies	Total	0 kW
Electrical feeding cable**	Power supply	3N PE 380V 50Hz
	nominal capacity	kW
	nominal current	A
	Max. cross-section (single wire / multiwire / fine wire with sleeve),Connecting line made of copper [CU]	mm² / mm²
Fresh water	Fresh water final rinse: soft cold water	340 l/h
Tank filling	Tank filling: soft hot water	550 l
Air outlet	Exhaust air volume approx.	800 m³/h
	Exhaust air temperature approx.	35 °C
	Relative humidity approx.	85 %

# Technical data sheet

<b>Heat load</b>	total	5,9 kW
	perceptible	2,4 kW
	latent	3,5 kW
<b>Dimensions of machine</b>	Feeding section (E)	1700 mm
	Prewash section (VA)	900 mm
	Wash tank (HWZ)	900 mm
	Wash tank (HWZ)	900 mm
	Washing tank (KWZ)	1300 mm
	Unloading section / drying section (A)	3000 mm
	Total	8700 mm
<b>Machine separation</b>		Separation at the unloading section
		Separation between 1st and 2nd wash zone
<b>Equipment</b>		Exhaust air heat recovery
		Drying (TR1500)

\* The plate performance data - as a variable of the machine (e.g. for planning and dimensioning exhaust air systems) - is based on a belt finger division of 54 mm and three plates per finger division. When selecting an individual transport belt with potentially divergent division, other values than the actual plate performance can result.

\*\* The total connection value as well as the connection dimension may differ from the sum of individual consumers due to different phase assignment and individual, interlocked heating elements!